

CellCOM GSM Intercom

CE



Accepts any GSM SIM card.
Quad band modem.
850 / 900 / 1800 / 1900 MHz



GSM SIGNAL



Call fixed line phone




Call mobile cell
phone



Calls up to 3 numbers in
sequence

- GSM intercom for unlimited range access control.
- Makes phone calls on a SIM card, just like a cell phone.
- Can call up to 3 numbers in sequence.
- Can call both fixed line and mobile phones.
- Caller ID feature built in for access control for up to 100 numbers.
- Optional iPhone and Android apps available for advanced control of relay output.
- 2 year manufacturers warranty.

CellCOM GSM Intercom

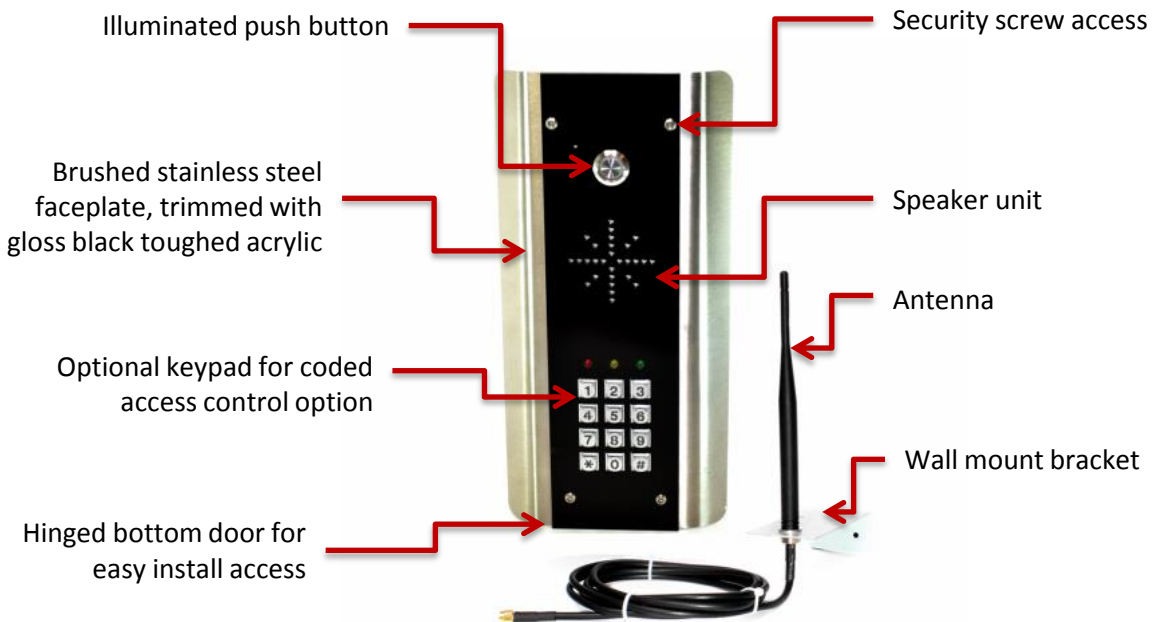

Technical Details

Power Supply	12-15vdc (adaptor included)	GSM Modem	Quad band 850/900/1800/1900
Current Consumption	50mA standby, 250mA calling, keypad additional 15mA	Modem approvals	CE & FCC
Relay Outputs	1	Programming method	SMS programming
Relay type	N/O & N/C contacts	Caller ID	100 numbers
Relay time	Adjustable 1-9999 seconds	Relay control	By phone and SMS
Relay load	2A 24v AC max	Keypad relays	3
IP rating	IP55	Keypad programming	On the keypad keys
		Keypad codes	1200 total
		Wigand output	Yes, 26 & 34 bit

CellCOM GSM Intercom



Curved Architectural range



Traditional Hooded range



- All models weather rated to IP65.
- Stainless steel construction.
- Keypad and prox tag options available for optional coded or tag entry.
- Neon blue illuminated call buttons and keypad keys.

The best just got better!

CELLCOM



(standard model) GSM-3AB
(keypad model) GSM-3ABK

Feature	CellCOM
Numbers dialling	3
Call buttons	1
Relay outputs	1
Power supply	12v dc

CELLCOM+



(standard model) GSM-4AB
(keypad model) GSM-4ABK

Feature	CellCOM+
Numbers dialling	4
Call buttons	Up to 10 (depending on panel model)
Relay outputs	2
Power supply	12-24v ac or dc

Other new features for CellCOM+ models...

- Easier programming format with simple 4 digit passcode followed by # .
- Blue GSM signal LED flash count to represent 1, 2, 3 or 4 bars of signal.
- 1-9 adjustable speaker and microphone volume level.
- Message alert feature option when gates are opened.
- Individually adjustable ring time for each number.

CellCOM+ models available May 2014



Architectural model

- Curved modern profile.
- Blue back lighting illumination from behind the curved sides.
- Illuminated stainless steel push button.
- Surface mount.
- Stainless steel construction.
- Stylish gloss black acrylic trimmed face.
- IP55 weather proof design.

GSM-3AB

CELLCOM Standard model



Architectural model with Keypad

- With added keypad for optional coded access control.
- Keypad has 3 replay outputs.
- All metal buttons with illuminated numbers.
- Total 1200 code storage capacity.
- Impressive list of additional features.
- IP55 weather proof design.

GSM-3ABK

CELLCOM standard model



Architectural model with Proximity module

- With added proximity tag / card reader.
- Comes with 3 user tags, + 1 add tag and 1 delete tag.
- 1 second or 5 second relay output, N/C & N/O volt free.
- 125KHz frequency.
- Compatible with 4001 / 4100, EM / TEMIC / TK tags.
- Confirmation bleep on successful swipe.
- IP55 weather proof design.

GSM-3ABP

CELLCOM standard model



PROX1

Proximity tag



Hooded model

- Traditional hooded design panel for a more robust appearance.
- All stainless steel construction.
- Illuminated stainless steel button.
- Hinged front door for easy wiring.
- 100mm width, suitable for post mounting or larger door frames.
- Stylish gloss black acrylic trimmed face.
- IP55 weather proof design.

GSM-3HB

CELLCOM standard model



Hooded model with Keypad

- With added keypad for optional coded access control.
- Keypad has 3 relay outputs.
- All metal buttons with illuminated numbers.
- Total 1200 code storage capacity.
- Impressive list of additional features.
- IP55 weather proof design.

GSM-3HBK

CELLCOM standard model



Flush mounting model

- Flush fitting panel, designed to be rebated into wall.
- Sleek design with stainless steel and gloss black trim.
- Stainless steel back box.
- Illuminated stainless steel button.
- IP55 rated (depending on proper installation).

GSM-3FB

CELLCOM standard model



Flush mount with keypad

- With added keypad for optional coded access control.
- Keypad has 3 relay outputs.
- All metal buttons with illuminated numbers.
- Total 1200 code storage capacity.
- Impressive list of additional features.
- IP55 weather proof design.

GSM-3ABK

CELLCOM standard model



Pedestal mount, vehicle / commercial model

- Pedestal mountable on industry standard goose neck brackets.
- Standard 3" x 3" mounting hole array.
- Super loud 4 watt speaker for use along side engine running.
- Directional microphone.
- Hinged front door with security key access (2 keys provided).
- Stainless steel construction.
- Stylish gloss black acrylic trimmed face.
- IP55 weather proof design.

GSM-3iB

CELLCOM standard model



Pedestal mount with keypad

- Pedestal mountable on industry standard goose neck brackets.
- With built in keypad for optional coded access control.
- Standard 3" x 3" mounting hole array.
- Super loud 4 watt speaker for use along side engine running.
- Directional microphone.
- Hinged front door with security key access (2 keys provided).
- Stainless steel construction.
- Stylish gloss black acrylic trimmed face.
- IP55 weather proof design.

GSM-3ABK

CELLCOM standard model