

# Predator-Wifi Firmware Update Instructions

Ensure the intercom is currently online and can be viewed from a phone or device on the same network

With a network connected PC on the same network, go to [www.aesglobalonline.com](http://www.aesglobalonline.com) and select Downloads link.

Download the following onto your PC..

a. AES Firmware Updater.

b. the latest BIN file.




The screenshot shows a window titled "Search for Doorbell" with a list of devices on the left and a configuration panel on the right. The device "Bell(192.168.1.171)[81]" is selected. The configuration panel includes tabs for "Basic information", "Advanced Setup", and "Other". The "Basic information" tab is active, showing fields for IP (192.168.1.171), Subnet mask (255.255.255.0), Gateway (192.168.1.254), DNS1 (8.8.8.8), DNS2 (192.168.1.254), MAC (00:6e:02:82:46:01), Port (81), ID (AES-000009-AEDEB), Name (Bell), System version (4.3.12.38), and Web version (11.1.0.20141125). A "Setting" button is located next to the Name field. At the bottom, there are fields for "User" (admin) and "Pwd", and a "Clear Arp" button. Buttons for "Modify IP" and "Refresh" are also visible at the bottom left.

1. Run the "Search for Doorbell Lite" application on your PC as administrator and allow firewall access when prompted.

2. If the Predator-Wifi is on the same network, the search tool will identify it and will show its IP address under Device

3. Click on the Bell to highlight it and the blank text fields will then display information about the Predator.



#### 4. Click on "Other" tab

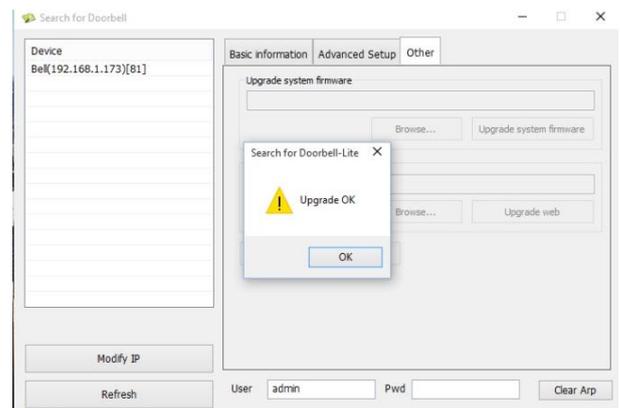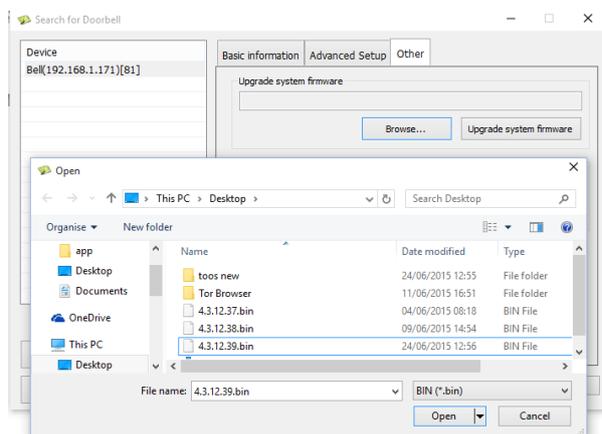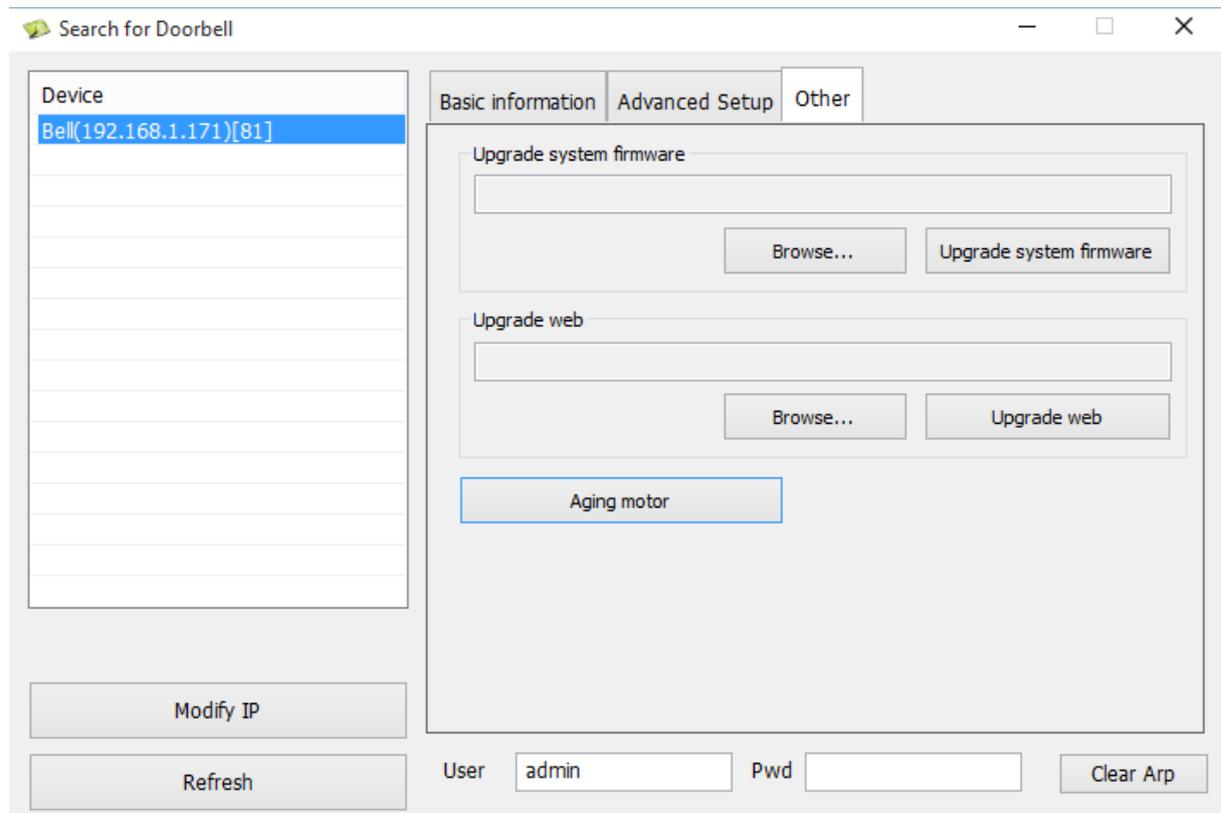

#### 5. Click on Browse and search for the location of the Firmware Bin file and click Open. Then click on "Update System Firmware"

The Predator will reboot and this may take up to 2 minutes, it will then show the new firmware version under the information tab

**7. Under the Advanced Setup Tab, enter the new ID for the Predator and press “Setting”**

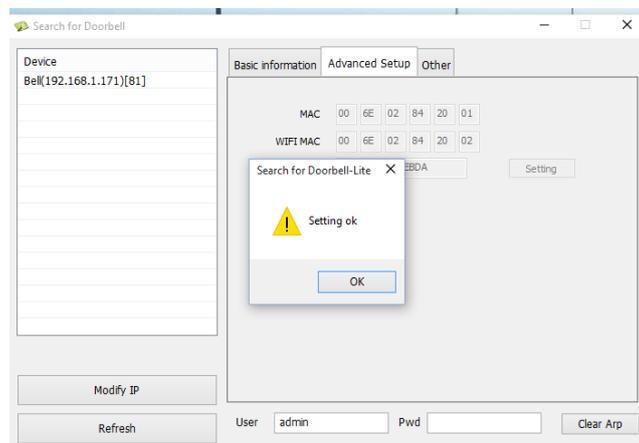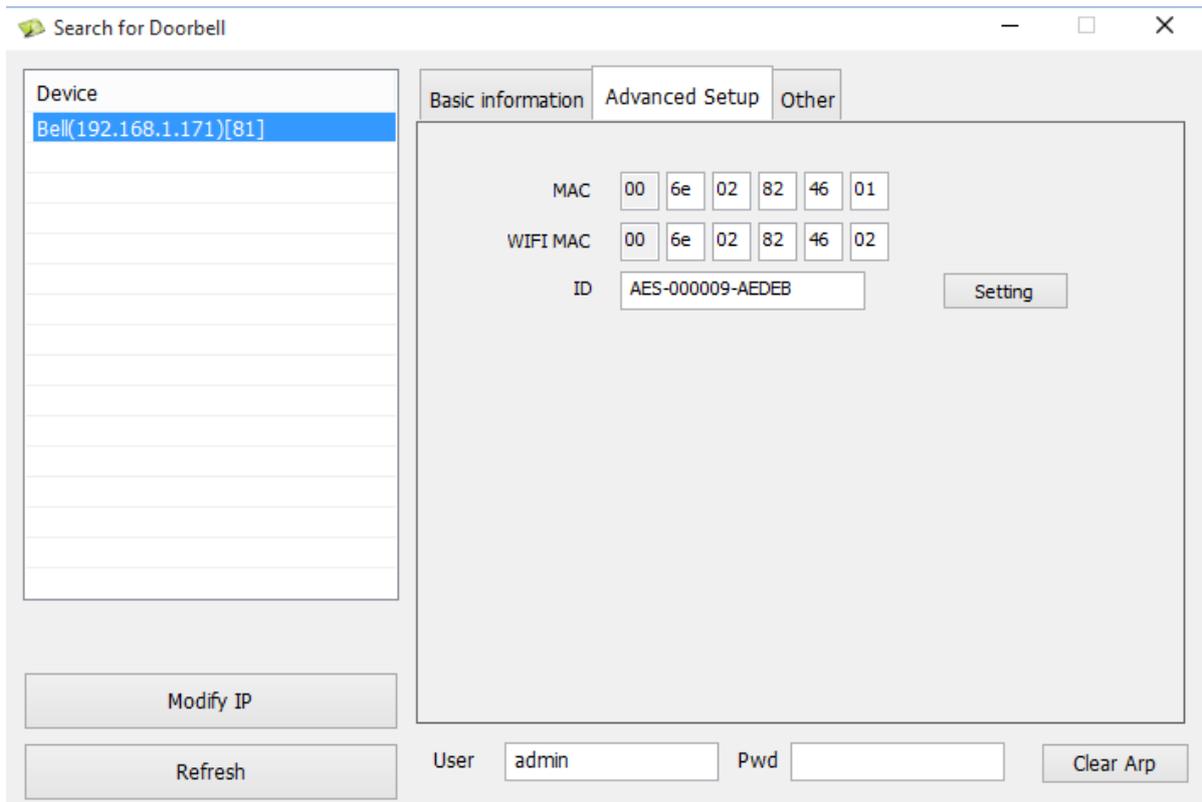

The Predator will then reboot and could take up to 2 minutes before it is back on the network and the new ID will be displayed.

The Firmware and ID updates are now complete.

**8. Note:** The predator is now updated to work with the upgraded PRO app version. Delete your old app. Search for wifi-predator PRO on google play or apple store and install the new PRO version.

**9.** Press the banner to add an intercom, and then enter the new BELL ID, and the same user name and password as before, and clock DONE.

**10.** If the device does not show online, try going through the re-installation procedure from the beginning as though you were adding your phone or device for the first time.

Should you have any trouble with this procedure, call AES on +44 288 639 0 693 and press option 4 for technical support.